

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
13 May 2004 (13.05.2004)

PCT

(10) International Publication Number  
WO 2004/039229 A1

(51) International Patent Classification<sup>7</sup>: A47J 037/12, H05B 003/78

(21) International Application Number:  
PCT/AU2003/001431

(22) International Filing Date: 31 October 2003 (31.10.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2002952394 31 October 2002 (31.10.2002) AU

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant and  
(72) Inventor: WILSON, Ian, Geoffrey [AU/AU]; 40 Cochran Road, Cheltenham, NSW 2119 (AU).


(74) Agent: DUMMER, Peter, C.; Wallington-Dummer, GPO Box 3888, Sydney, NSW 2001 (AU).

**Published:**

- with international search report
- with amended claims

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DEEP FRYING APPLIANCE

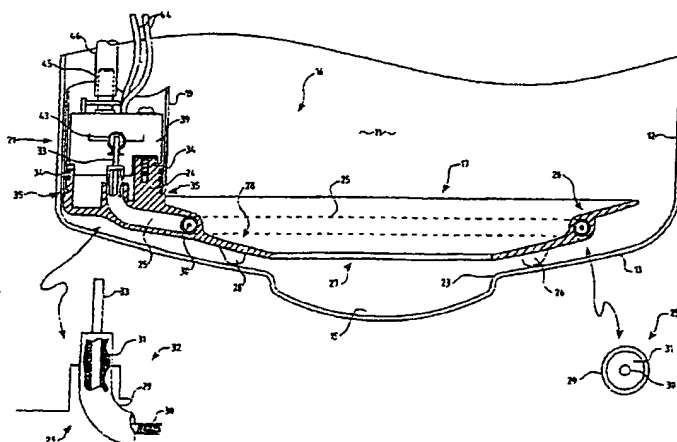

(57) **Abstract:** An electric deep frying appliance adapted for the heating of cooking oil comprising a bowl and heating assembly; said heating assembly including a heat distributor wherein said heat distributor is in the form of an annular dished member, said heating assembly further including a control pylon adapted to provide power and temperature control to said heat distributor.

WO 2004/039229 A1

Best Available Copy

7/pts

DEEP FRYING APPLIANCE

The present invention relates to equipment for the deep frying of food, and more particularly to electric deep frying appliances for domestic or small commercial use.

5

**BACKGROUND**

The deep frying of foods in oil such as for example fish and chips has long been practiced on a commercial basis. The equipment used is generally in the form of large  
10 volume stainless steel tanks, frequently gas fired. Commonly the heating source or sources are so arranged as to maximize the useful life of the large volumes of expensive cooking oil by minimizing the harmful carbonizing of the oil. Such carbonizing is caused by high  
15 concentrations of heat per unit area at the heating source.

It is usual also in such commercial systems to incorporated a cool area at the base of the tank which allows any carbonized particles which may form to collect in this cool area and thus be isolated from further  
20 heating. This is an important consideration in the design of deep frying equipment since some studies have linked carbonized heating oil to detrimental health effects.

In recent years the market has seen the development of a range of electric deep frying appliances, primarily

Best Available Copy

intended for domestic use. They generally fall into two categories: bowls with separate heating elements depending into the bowl and bowls with fixed external heating elements. Both categories suffer from a number of  
5 disadvantages.

In the interest of cleaning, the elements and electrical control unit of deep fryers in the first category, are generally removable as a unit. The heating elements of these units generally employ a tubular heating  
10 coil bent into some suitable pattern to distribute heat to the oil in which the element is immersed. Because the length of such tubular coils is limited by practical restrictions inherent in their manufacture, the resulting ratio of heat energy emitted per unit area to achieve a  
15 required deep frying temperature is very high; sufficiently high to induce carbonizing.

Another difficulty in this first category of deep frying appliances is the positioning of the thermostat thermocouple. It is necessary to control not only the  
20 cooking oil temperature prior to the addition of cold food, but also to quickly sense the temperature reduction as a result of the addition of such food. If the temperature controlling device does not sense a reduction in oil temperature quickly enough and re-energises the heating

element, the food will absorb excessive amounts of oil. To compensate for this lag in thermal response, many deep fryers have higher than desirable initial oil temperature settings, which results in the inevitable rapid degradation  
5 of the oil.

Additionally, because of the danger of igniting cooking oil, regulatory authorities subject deep fryers to rigorous testing. It is a requirement of sale, for example, that if a deep fryer is turned on with either no oil, or  
10 only a remaining oil residue after emptying, that no fire will be ignited. The thermocouple must react both to the oil when present, and the heating element when no oil is present.

A known solution has been to attach the thermocouples  
15 and their connection tubes to the coils but this renders them vulnerable and makes cleaning difficult.

In deep frying appliances of the second category, the heating element is often attached to the underside of the bowl. This inevitably leads to considerable inefficiency as  
20 only a proportion of the heat emitted by the element can be transferred to the oil inside the bowl. Again the configuration of the heating element is generally that of a single coil so that the heat induced per unit of surface area of the bowl is likely to be considerably higher than

desirable. This second category of fryers has traditionally used thermostats attached to the outside of the heating bowl. As a result, it is difficult for these to quickly sense a drop in internal oil temperature, and thus cooking performance suffers.

Additionally, carbonised materials gravitate to the hottest part of the container and degrade the oil rapidly

It is an object of the present invention to address or ameliorate at least some of the above disadvantages.

10

#### BRIEF DESCRIPTION OF INVENTION

Accordingly, in one broad form of the invention there is provided an electric deep frying appliance adapted for the heating of cooking oil comprising a bowl and heating assembly; said heating assembly including a heat distributor wherein said heat distributor is in the form of an annular dished member; said heating assembly further including a control pylon adapted to provide power and temperature control to said heat distributor.

Preferably said bowl is formed of a substantially vertical wall part and a dished base part.

Preferably said bowl is formed of mild steel.

Preferably said bowl is formed of stainless steel.

Preferably said bowl is formed of aluminium.

Preferably said bowl is supported in a suitable support structure.

Preferably said dished base part is provided with a central depression, said central depression adapted to the accumulation of oil contaminants.

Preferably said annular dished member extends substantially between the perimeter of said central depression and the internal surface of said wall part.

Preferably said heating assembly is removable from said bowl.

Preferably said annular dished member contains a heat emitting tubular element.

Preferably said annular dished member is formed of pressure die-cast aluminium, said die cast aluminium enveloping said tubular element.

Preferably said tubular element is in the form of a steel tube having an insulated heating coil spring along the axis of said tube; said coil spring connected to terminals at the outer ends of said spring.

Preferably said annular dished member is provided with an integrally die-cast raised pylon connector spigot.

Preferably said annular dished member is provided with integrally cast support members projecting from the underside of said dished member so as to raise said dished

member above the surface of said dished base part of said bowl.

Preferably said terminals of said coil spring project upwardly in said connector spigot.

5        Preferably said control pylon includes a vertical tubular member and a control module, said control module sealably connected to the upper end of said tubular member.

Preferably said raised pylon connector spigot is sealably connected to the lower end of said tubular member.

10       Preferably said tubular member is of a length sufficient to position said control module above the rim of said bowl when said annular dished member of said heat distributor is resting with said support members on said dished base part of said bowl.

15       Preferably said heating assembly includes a thermostat and power connection module, said module adapted to mount to said connector spigot within said vertical tubular member.

Preferably said thermostat and power connection module  
20 includes an adjustable thermostat mechanism, said mechanism provided with a vertically projecting adjustment shaft.

Preferably said thermostat and power connection module includes connector means adapted to provide electrical connection with said terminals of said heating coil spring

when said thermostat and power connection module is located on said connector spigot.

Preferably said control module is provided with a safety switch projecting from said module such that said switch is in a first "power enabled" position when said heating assembly is properly installed in said bowl.

Preferably said safety switch is in a second "power disabled" position when said heating assembly is removed from said bowl.

10 Preferably power conductors extending the length of said tubular member are connected between said connector means and said safety switch.

Preferably said control module is provided with a main power switch adapted to provide mains power to said safety switch.

15 Preferably said control module is provided with a thermostat control knob, said control knob connected to said thermostat adjustment shaft by a connector rod.

20 Preferably said thermostat control knob and said adjustment shaft are adapted to the setting of said thermostat module to transfer power to said heating element up to a desired temperature of cooking oil within a predetermined range of temperatures.



Preferably said thermostat control knob and said adjustment shaft are adapted to the re-setting of said thermostat module.

Preferably said control module is provided with a  
5 power socket adapted to receive a power input plug.

Preferably the electrical characteristics of said heat emitting tubular element and the surface area of said annular dished member are adapted to have a maximum heat flux density of less than 5 watts per centimeter squared.

10 Preferably a sludge strain basket is provided; said basket adapted to restrict turbulent flow of oil proximate to said dished part of said bowl; said basket adapted to capture particulate carbon.

In a further broad form of the invention there is  
15 provided an electric deep frying appliance adapted for the heating of cooking oil comprising a bowl and heating assembly; said heating assembly including a heat distributor wherein said heat distributor is in the form of a tubular heating element; said heating assembly further  
20 including a control pylon adapted to provide power and temperature control to said heat distributor.

Preferably said bowl is formed of a substantially vertical wall part and a dished base part.

Preferably said bowl is formed of mild steel.

Preferably said bowl is formed of stainless steel.

Preferably said bowl is formed of aluminium.

Preferably said bowl is supported in a suitable support structure.

5        Preferably said heat distributor is in the form of a tubular heating element; said tubular heating element arranged in a symmetrical pattern projecting generally in a horizontal plane from the lower end of said control pylon; said pattern adapted to an even distribution of heat  
10 emanating from said tubular heating element.

Preferably said tubular heating element is comprised of a steel tube having an insulated heating coil spring along the axis of said tube; said coil spring connected to terminals at the outer ends of said spring.

15        Preferably said control pylon includes a vertical tubular member and a control module, said control module sealably connected to the upper end of said tubular member.

Preferably said control pylon is provided with an end cap sealably connected to the lower end of said control  
20 pylon.

Preferably said heating assembly includes a thermostat and power connection module, said module adapted to mount within said end cap.

Preferably said thermostat and power connection module includes an adjustable thermostat mechanism, said mechanism provided with a vertically projecting adjustment shaft.

Preferably said thermostat and power connection module  
5 includes connector means adapted to provide electrical connection with said terminals of said heating coil spring when said thermostat and power connection module is located on said connector spigot.

Preferably said control module is provided with a  
10 safety switch adapted to prevent transmission of power to said heating coil spring when said heating assembly is improperly installed in said bowl.

Preferably said safety switch is adapted to prevent transmission of power to said heating coil spring when said  
15 heating assembly is not installed in said bowl.

Preferably a first thermostat and a second thermostat are in thermal communication with said end cap.

Preferably said end cap is in thermal communication by bridging means with a portion of said tubular heating  
20 element; said portion being thermally remote from said end cap.

Preferably said first thermostat is adapted to cut power to said heating element at a predetermined

temperature; said temperature being a desired temperature of said cooking oil.

Preferably said second thermostat is adapted to cut power to said heating element at a temperature  
5 significantly higher than any desired temperature of said cooking oil.

In yet a further broad form of the invention there is provided an electric deep frying apparatus adapted for the heating of cooking oil comprising a bowl and a heat source;  
10 said heat source supplied by power cables conducted through a sealed control pylon extending between said heat source and the bowl entry.

Preferably said heat source comprises a heating element in heat conducting communication with a heat  
15 distributor.

Preferably said heat distributor is in the form of a dish having a central aperture.

Preferably said control pylon defines an oil-free volume.

20 Preferably a temperature control device is located at the base of said control pylon.

Preferably said temperature control device includes a bi-metallic strip; at least a portion of said strip being in thermal communication with said heat distributor.

Preferably said temperature control device is adjustable; an adjustment shaft passing from said temperature control device through said control pylon to a control module.

5        Preferably a sludge strain basket is provided; said basket adapted to restrict turbulent flow of oil blow said central aperture of said heat distributor; said basket adapted to capture particulate carbon.

10        In yet a further broad form of the invention there is provided an electric deep frying apparatus adapted for the heating of cooking oil comprising a bowl and a heat source; said heat source supplied by power conductor cables passing through a sealed vertical control pylon extending between said heat source and the bowl entry.

15        Preferably said heat source is in the form of a heating coil, said coil suspended spaced away from the base of said bowl by said control pylon.

20        Preferably said heating coil is provided with terminals issuing from an end cap sealably connected to the base of said pylon.

Preferably said end cap is provided with a heat conducting bridge in thermal communication with a portion of said heating coil.

Preferably dual self resetting thermostat units are mounted in the base of said control pylon; said thermostat units in thermal communication with said end cap and said heat conducting bridge.

5        Preferably a first of said thermostat units is adapted to prevent the supply of electrical power to said heating coil above a predetermined temperature of the cooking oil as thermally communicated to said casting; said predetermined temperature being associated with an optimum  
10        temperature for deep frying.

         Preferably a second of said thermostat units is adapted to act as a safety power cut-off means, acting to prevent supply of electrical power to said heating coil at a temperature significantly higher than said predetermined  
15        temperature as thermally communicated through said heat conducting bridge.

         In yet a further broad form of the invention there is provided a method for the heating of cooking oil in a bowl by means of a heat distributor wherein the maximum heat  
20        flux density of said heat distributor is not greater than 5 watts per centimeter squared; said method including the steps of:

- (a) Providing a heat distributor in the form of a die cast dish having a central aperture,

- (b) positioning said heat distributor in a bowl having a dished base and central depression,
- (c) supporting said heat source clear of said dished base.

5        Preferably said die cast dish envelops a tubular heating element in heat conducting communication with said heat distributor.

         Preferably said die cast dish extends substantially between the internal confines of said bowl and the  
10 periphery of said central depression.

         Preferably said tubular heating element is supplied with electrical power via a control pylon sealably attached to a portion of said die cast dish.

         Preferably said control pylon extends vertically to at  
15 least the rim of said bowl; the upper end of said pylon sealably attached to a power control module.

         Preferably a temperature control module in the form of a thermostat is positioned at the base of said control pylon and in thermal communication with said die cast dish.

20        Preferably said temperature control module is adjustable by means of a control rod extending up through said control pylon from said temperature control module to a control knob mounted to said power control module.

Preferably the surface area of said die cast dish and the electrical characteristics of said tubular heating element are adapted to emit no greater than said maximum heat flux density of 5 watts per centimeter squared.

5

#### BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments of the present invention will now be described with reference to the accompanying drawings wherein:

10      Figure 1 is a perspective view of an assembled deep frying appliance according to the invention.

Figure 2 is a perspective view of a heating assembly of the appliance of figure 1.

15      Figure 3 is a sectioned view of a lower portion of the deep frying appliance of figure 1.

Figure 4 is a plan view of a part of the heating assembly of figure 2.

Figure 5 is a plan view of a further embodiment of the invention.

20      Figure 6 is a sectioned view of the embodiment of figure 5.

Figure 7 is a perspective exploded view of a further preferred embodiment of the invention.



Figure 8 is a sectioned side view of figure 7 when assembled.

#### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

5 A first preferred embodiment of an electric deep frying appliance 10 according to the present invention will now be described with reference to figure 1. A bowl 11 having generally vertical walls 12 and a dished base part 13 is adapted to hold a quantity of cooking oil 14 and is  
10 mounted in a support structure (not shown). The support structure may be a simple stand or an enveloping shell of, for example, a suitable injection moulded polymer so as to provide both support and prevent contact with the outside of the bowl 11 when this is hot.

15 The bowl 11 may be formed of any suitable material including mild steel, stainless steel or aluminium. The base 13 of bowl 11 is provided with a central depression 15. Optionally, the bowl may be provided with a lid (not shown) which may be loose or hinged to the bowl 11 or to an  
20 enveloping shell. Bowl 11 may be of circular or oblong or any other suitable shape.

With reference to figures 2 and 3, a heating assembly 16 is comprised of a heat distributor 17 and a control pylon 18. Control pylon 18 is further comprised of pylon

tube 19 and control module 20. In a preferred embodiment bowl 11 is provided with a protruding vertical channel 22 as shown in figure 1, adapted to at least partially accommodate control pylon 18 so as to minimize its intrusion into the cooking area of bowl 11.

Heat distributor 17 has an annular dished form extending between the periphery 23 of central depression 15 and vertical walls 12 as may best be seen in figure 3. Heat distributor 17 is provided with a circular shaped pylon connector spigot 24 projecting upwardly at a point on its periphery. The plate 17 and spigot 24 form a single unit of, for example, pressure die-cast aluminium construction. Heat distributor 17 is cast around a tubular heating element 25 shown in dashed outline in figures 3 and 4.

Preferably the heat distributor 17 casting includes at least three projections from its underside in the form of supporting pillars 26 so as to position the heat distributor at some distance above the base 13 of the bowl 11. Plate 17 is provided with a central aperture 27 adapted to allow cooler oil and any contaminants such as food particles to sink to the central depression 15 of bowl 11. The dished shape of sides 28 of heat distributor 17 allows for a greater surface contact area as well as aiding in

the directing of particulate matter towards the aperture 27 and central depression 15.

With reference to figure 3, tubular heating element 25 is of conventional construction, comprising an outer steel tube 29 containing a heating coil spring 30 and an insulating material 31. As can best be seen in figure 4, tubular heating element 25 forms an almost closed loop within heat distributor 17 with the ends 32 of the element bending upwardly to emerge from the casting at raised pylon connector spigot 24. Again with reference to figure 3, terminal rods 33 connected to the two ends of the heating coil spring 30, project from the tubular heating element ends 32 to provide connections for power input to the heating coil spring 30.

The control pylon tube 19 is a metal tube having a circular section adapted to attach to pylon connector spigot 24 of heat distributor 17. Sealing between control pylon tube 19 and pylon connector spigot 24 may be effected for example, by means of at least one "o" ring seal 34 together with a crimping of the edge 35 of the pylon tube 19 into a suitably formed recess as illustrated in figure 3. Alternatively, pylon tube 19 may be affixed to the connector spigot 24 by means of welding or brazing.

Control module 20 is fitted to the upper end of control pylon tube 19. The length of pylon tube 19 is such that control module 20 locates just above the rim 36 of bowl 11 when heating assembly 16 is placed in the bowl (refer figure 1). Control module 20 is comprised of an enclosure having a base portion 37 sealably attached to pylon tube 19 and a closure portion 38. When assembled to form heating assembly 16, control module 20, pylon tube 19 and heat distributor 17 form a sealed unit.

10 Control module 20 is provided with a temperature selector knob 40 a power switch 41 and a power safety switch 42. Power safety switch 42 projects from the bottom of base portion 37 of control module 20 so as to contact the rim 36 of bowl 11 or the bowl support structure. When 15 heating assembly 16 is properly installed in bowl 11, safety switch 42 is caused to assume a "power on" position. When heating assembly 16 is removed from bowl 11 or not correctly positioned in it, safety switch 42 assumes its default position of "power off".

20 Prior to the assembly of closure portion 38 to base portion 37, thermostat module 21 is installed in the base of pylon tube 19. Thermostat module 21 is comprised of a housing 39 containing a thermostat mechanism (not shown) and spring clip power connector means 43 which project from

housing 39. Housing 39 is adapted to slide into pylon tube 19 and seat against control pylon connector spigot 24. When fixed in this position, power connector means 43 are engaged to the terminal rods 33 of heating coil spring 30.

5        Power connector means 43 are provided with power via the thermostat mechanism (not shown) located in housing 39. The thermostat mechanism is in turn connected by power conductor cables 44 to safety switch 42. Safety switch 42 is in turn connected by conductor means to power switch 41.

10        The thermostat mechanism is provided with adjustment shaft 45 projecting upwardly from housing 39 and is connected to temperature selector knob 40 by means of connector rod 46. Preferably, the thermostat mechanism comprises a bi-metallic strip at least a portion of which  
15 is in thermal communication with the pylon connector spigot.

      The surface area of heat distributor 17 and the electrical characteristics of tubular heating element 25 are adapted to the size and oil volume of a given bowl to  
20 provide a heat source having a heat flux density of no greater than approximately 5 watts per square centimeter. It has been found that heat fluxes higher than this can cause carbonization of cooking oils with a concomitant reduction in oil life and adverse health indications.

This relatively low power level is sufficient to limit the maximum heat distributor temperature to a level relatively close to that of the optimum cooking temperature of the oil. In addition to avoiding carbonizing, the large surface area of the heat distributor when compared with prior art heat sources, decreases the degree of the sudden drop in oil temperature when cold food is introduced into the bowl. This is aided by the locating of the thermostat module in close proximity to the heat distributor. Thus the efficiency of the cooking process in both time and energy expenditure is improved.

In a second preferred embodiment, the heat distributor is a casting which has the loop of the tubular steel heating element attached to its underside, for example by brazing. The ends of the heating element then pass upwardly through the base of the pylon connector spigot to emerge in the base of the communication pylon for attachment to the thermostat control module as described above.

In yet a further preferred embodiment, the heat distributor is comprised of concentric and dished rings of flattened heating elements issuing from the communication pylon spigot. The thermostat module is in thermal contact with the spigot so as to maximize the sensitivity of the thermostat to changes in the oil temperature.

In yet a further preferred embodiment as shown in figures 5 and 6, the heat distributor 17 is in the form of a heating element tube 50 bent into a suitable heat distributing pattern 51 and issuing from an end cap 52 at the base of communication pylon 18. In this embodiment the end cap 52 at the base of the pylon 18 is formed either as a casting or a metal pressing sealably connected to the end of pylon tube 19.

A thermal bridge 53 is attached to the base of the end cap 52 and at a point 54 on the heating element tube 50 of the heat distributor, preferably at a point thermally remote from end cap 54 along the length of the tube 50. The bridge 53 serves to transfer heat to the end cap 52 at the base of the pylon in the event that the heating element has been switched on with no, or insufficient oil in the bowl.

Dual self re-setting thermostat units 55 and 56 are located in the end cap 52 of the pylon tube 19 and arranged so as to be in thermal communication with the end cap. The first of these thermostat units is set to cut power to the heating element when the heat transfer from heated oil around the end cap reaches a predetermined temperature. The second thermostat unit responds to cut power at a

significantly higher temperature, acting as a safety back-up to the first.

A further preferred embodiment of a heating assembly according to the invention is described with reference to the exploded views of figure 7 and the sectioned side view of figure 8 wherein like features are numbered as before but with the addition of 100. Heating assembly 116 again includes heat distributor 117 interconnected with control module 120 by control pylon 118.

Heat distributor 117 is provided with pylon connector spigot 124 which in this embodiment is provided with annular seating portion 153 and external thread 154. Pylon tube 119 is provided with projecting annular flange 151 and internally threaded ring 150 free to slide downwardly around the outer surface of pylon tube 119 until arrested by flange 151. The underside of flange 151 is a flat surface as is annular seating portion 153; each surface being normal to the axes of pylon tube 119 and connector spigot 124 respectively. Both surfaces are defined by similar outer and inner diameters. An "O" ring 152 is provided of a diameter to be supported on annular seating portion 153.

On assembly "O" ring 152 is placed on annular seating portion 153, pylon tube flange 151 is seated on the "O"



ring and the internally threaded ring 150 screwed down onto threaded portion 154 thereby compressing "O" ring 152 between the opposing surfaces of the annular seating portion 153 and underside of flange 151 respectively to  
5 effect an oil-tight seal between heat distributor 117 and pylon tube 119.

In at least some alternative forms of this embodiment the function of "O" ring 152 may be served by any suitable ring sealing means.

10 Thermostat module 121 is seated within the lower portion of pylon tube 119, attached to connector spigot 124. Power is fed via cables or other suitable power conducting means (not shown) down through pylon tube 119 to attach to terminals of thermostat module 121. Power is  
15 transmitted through thermostat module 121 to heating coil ends 133. The setting of thermostat module 121 for control of a desired temperature of cooking oil is effected by thermostat control rod 158 extending upwardly from the module through pylon tube 119 to control module 120.

20 Control module 120 is comprised of an enclosure having a base portion 137 sealably attached to pylon tube 119, a back closure portion 138 and control cap 139. Base portion 137 is attached to upper end of pylon tube 119 by means of adaptor 155. Adaptor 155 includes a lower skirt portion

156, an annular projecting flange portion 157 and an upper externally threaded portion 158. Lower skirt portion 156 is adapted to slide into pylon tube 119 and is affixed to the tube. Preferably pylon tube 119 and adaptor 155 are made of  
5 stainless steel.

The components forming control module 120 are preferably injection moulded from a suitable heat resistant polymer. Base portion 137 of control module 120 is provided with aperture 159 adapted to fit over externally threaded  
10 portion 158 of adaptor 155 to seat on projecting flange portion 157. On assembly, a threaded securing ring 160 is screwed down onto externally threaded portion 158 to secure base portion 137 to pylon tube 119.

Control module 120 is provided with thermostat control  
15 knob 140, rotation of which is transmitted via thermostat control rod 158. Control knob 140 movement is adapted to change the temperature setting in a first direction of rotation and affect the resetting of the thermostat overheat cutout condition when rotated fully in an opposite  
20 second direction. Control module 120 is further provided with power on/off switch 141. In this preferred embodiment power on/off switch 141 is integrated with safety switch mechanism 142 such that if heating assembly 116 is not properly located on the rim of its bowl, safety switch

mechanism 142 prevents power on/off switch 141 being set to its "on" position.

In at least one preferred embodiment of the invention as shown in figure 8, a sludge strain basket 165 is provided for the prevention of turbulent flow of oil through the central aperture of the heat distributor and for the purpose of trapping particulate carbonate matter. Preferably the basket clips into the internal periphery of the heat distributor so as to be readily removable for cleaning. It is provided in at least some forms with the internal partition grating as shown in plan view in figure 8. As an alternative to its retention in the aperture of the heat distributor, basket 165 may be supported or releasably retained at the base of the bowl (not shown in figure 8)

Clearly the embodiments described in detail above may be modified by those skilled in the art without departing from the concept and spirit of the invention. Thus for example a variety of bowl and heat distributor shapes may be employed without affecting the function and advantages of the invention.

**CLAIMS**

1. An electric deep frying appliance adapted for the heating of cooking oil comprising a bowl and heating assembly; said heating assembly including a heat distributor wherein said heat distributor is in the form of an annular dished member; said heating assembly further including a control pylon adapted to provide power and temperature control to said heat distributor.
2. The appliance of claim 1 wherein said bowl is formed of a substantially vertical wall part and a dished base part.
3. The appliance of claim 1 or 2 wherein said bowl is formed of mild steel.
4. The appliance of claim 1 or 2 wherein said bowl is formed of stainless steel.
5. The appliance of claim 1 or 2 wherein said bowl is formed of aluminium.
6. The appliance of any one of claims 1 to 5 wherein said bowl is supported in a suitable support structure.
7. The appliance of any one of claims 1 to 5 wherein said dished base part is provided with a central depression, said central depression adapted to the accumulation of oil contaminants.

8. The appliance of claim 7 wherein said annular dished member extends substantially between the perimeter of said central depression and the internal surface of said wall part.
- 5 9. The appliance of any one of claims 1 to 8 wherein said heating assembly is removable from said bowl.
10. The appliance of any one of claims 1 to 9 wherein said annular dished member contains a heat emitting tubular element.
- 10 11. The appliance of claim 10 wherein said annular dished member is formed of pressure die-cast aluminium, said die cast aluminium enveloping said tubular element.
12. The appliance of claim 10 or 11 wherein said tubular element is in the form of a steel tube having an insulated heating coil spring along the axis of said tube; said coil spring connected to terminals at the outer ends of said spring.
- 15 13. The appliance of any one of claims 1 to 12 wherein said annular dished member is provided with an integrally die-cast raised pylon connector spigot.
- 20 14. The appliance of any one of claims 2 to 13 wherein said annular dished member is provided with integrally cast support members projecting from the underside of said dished member so as to raise said dished member

above the surface of said dished base part of said bowl.

15. The appliance of claim 13 wherein said terminals of said coil spring project upwardly in said connector spigot.
16. The appliance of any one of claims 1 to 15 wherein said control pylon includes a vertical tubular member and a control module, said control module sealably connected to the upper end of said tubular member.
17. The appliance of claim 16 wherein said raised pylon connector spigot is sealably connected to the lower end of said tubular member.
18. The appliance of claim 16 or 17 wherein said tubular member is of a length sufficient to position said control module above the rim of said bowl when said annular dished member of said heat distributor is resting with said support members on said dished base part of said bowl.
19. The appliance of any one of claims 13 to 18 wherein said heating assembly includes a thermostat and power connection module, said module adapted to mount to said connector spigot within said vertical tubular member.

20. The appliance of claim 19 wherein said thermostat and power connection module includes an adjustable thermostat mechanism, said mechanism provided with a vertically projecting adjustment shaft.
- 5 21. The appliance of claim 19 or 20 wherein said thermostat and power connection module includes connector means adapted to provide electrical connection with said terminals of said heating coil spring when said thermostat and power connection  
10 module is located on said connector spigot.
22. The appliance of any one of claims 16 to 21 wherein said control module is provided with a safety switch projecting from said module such that said switch is in a first "power enabled" position when said heating  
15 assembly is properly installed in said bowl.
23. The appliance of claim 22 wherein said safety switch is in a second "power disabled" position when said heating assembly is removed from said bowl.
24. The appliance of any one of claims 16 to 23 wherein  
20 power conductors extending the length of said tubular member are connected between said connector means and said safety switch.
25. The appliance of any one of claims 22 to 24 wherein said control module is provided with a main power

switch adapted to provide mains power to said safety switch.

26. The appliance of any one of claims 16 to 25 wherein said control module is provided with a thermostat control knob, said control knob connected to said thermostat adjustment shaft by a connector rod.
27. The appliance of claim 26 wherein said thermostat control knob and said adjustment shaft are adapted to the setting of said thermostat module to transfer power to said heating element up to a desired temperature of cooking oil within a predetermined range of temperatures.
28. The appliance of claim 26 or 27 wherein said thermostat control knob and said adjustment shaft are adapted to the re-setting of said thermostat module.
29. The appliance of any one of claims 16 to 28 wherein said control module is provided with a power socket adapted to receive a power input plug.
30. The appliance of any one of claims 10 to 29 wherein the electrical characteristics of said heat emitting tubular element and the surface area of said annular dish member are adapted to have a maximum heat flux density of less than 5 watts per centimeter squared.



31. The appliance of any one of claims 2 to 30 wherein a  
sludge strain basket is provided; said basket adapted  
to restrict turbulent flow of oil proximate to said  
dished part of said bowl; said basket adapted to  
5 capture particulate carbon.
32. An electric deep frying appliance adapted for the  
heating of cooking oil comprising a bowl and heating  
assembly; said heating assembly including a heat  
distributor wherein said heat distributor is in the  
10 form of a tubular heating element; said heating  
assembly further including a control pylon adapted to  
provide power and temperature control to said heat  
distributor.
33. The appliance of claim 32 wherein said bowl is formed  
15 of a substantially vertical wall part and a dished  
base part.
34. The appliance of claim 32 or 33 wherein said bowl is  
formed of mild steel.
35. The appliance of claim 32 or 33 wherein said bowl is  
20 formed of stainless steel.
36. The appliance of claim 32 or 33 wherein said bowl is  
formed of aluminium.

37. The appliance of any one of claims 32 to 36 wherein said bowl is supported in a suitable support structure.
38. The appliance of any one of claims 32 to 37 wherein  
5 said heat distributor is in the form of a tubular heating element; said tubular heating element arranged in a symmetrical pattern projecting generally in a horizontal plane from the lower end of said control pylon; said pattern adapted to an even distribution of  
10 heat emanating from said tubular heating element.
39. The appliance of any one of claims 32 to 38 wherein said tubular heating element is comprised of a steel tube having an insulated heating coil spring along the axis of said tube; said coil spring connected to  
15 terminals at the outer ends of said spring.
40. The appliance of any one of claims 32 to 98 wherein said control pylon includes a vertical tubular member and a control module, said control module sealably connected to the upper end of said tubular member.
- 20 41. The appliance of any one of claims 32 to 40 wherein said control pylon is provided with an end cap sealably connected to the lower end of said control pylon.

42. The appliance of claim 41 wherein said heating assembly includes a thermostat and power connection module, said module adapted to mount within said end cap.
- 5 43. The appliance of claim 42 wherein said thermostat and power connection module includes an adjustable thermostat mechanism, said mechanism provided with a vertically projecting adjustment shaft.
- 10 44. The appliance of claim 42 or 43 wherein said thermostat and power connection module includes connector means adapted to provide electrical connection with said terminals of said heating coil spring when said thermostat and power connection module is located on said connector spigot.
- 15 45. The appliance of any one of claims 40 to 44 wherein said control module is provided with a safety switch adapted to prevent transmission of power to said heating coil spring when said heating assembly is improperly installed in said bowl.
- 20 46. The appliance of claim 45 wherein said safety switch is adapted to prevent transmission of power to said heating coil spring when said heating assembly is not installed in said bowl.

47. The appliance of any one of claims 32 to 46 wherein a first thermostat and a second thermostat are in thermal communication with said end cap.
48. The appliance of any one of claims 41 to 47 wherein  
5 said end cap is in thermal communication by bridging means with a portion of said tubular heating element; said portion being thermally remote from said end cap.
49. The appliance of claim 47 or 48 wherein said first thermostat is adapted to cut power to said heating  
10 element at a predetermined temperature; said temperature being a desired temperature of said cooking oil.
50. The appliance of any one of claims 47 to 49 wherein said second thermostat is adapted to cut power to said  
15 heating element at a temperature significantly higher than any desired temperature of said cooking oil.
51. An electric deep frying apparatus adapted for the heating of cooking oil comprising a bowl and a heat source; said heat source supplied by power cables  
20 conducted through a sealed control pylon extending between said heat source and the bowl entry.
52. The deep frying apparatus of claim 51 wherein said heat source comprises a heating element in heat conducting communication with a heat distributor.

53. The deep frying apparatus of claim 52 wherein said heat distributor is in the form of a dish having a central aperture.
54. The deep frying apparatus of any one of claims 51 to  
5 52 wherein said control pylon defines an oil-free volume.
55. The deep frying apparatus of any one of claims 51 to 54 wherein a temperature control device is located at the base of said control pylon.
- 10 56. The deep frying apparatus of claim 55 wherein said temperature control device includes a bi-metallic strip; at least a portion of said strip being in thermal communication with said heat distributor.
57. The deep frying apparatus of claim 55 or 56 wherein  
15 said temperature control device is adjustable; an adjustment shaft passing from said temperature control device through said control pylon to a control module.
58. The deep frying apparatus of any one of claims 52 to  
20 57 wherein a sludge strain basket is provided; said basket adapted to restrict turbulent flow of oil blow said central aperture of said heat distributor; said basket adapted to capture particulate carbon.
59. An electric deep frying apparatus adapted for the heating of cooking oil comprising a bowl and a heat

source; said heat source supplied by power conductor cables passing through a sealed vertical control pylon extending between said heat source and the bowl entry.

60. The deep frying apparatus of claim 59 wherein said  
5 heat source is in the form of a heating coil, said coil suspended spaced away from the base of said bowl by said control pylon.

61. The deep frying apparatus of claim 60 wherein said heating coil is provided with terminals issuing from  
10 an end cap sealably connected to the base of said pylon.

62. The deep frying apparatus of claim 61 wherein said end cap is provided with a heat conducting bridge in thermal communication with a portion of said heating  
15 coil.

63. The deep frying apparatus of claim 62 wherein dual self resetting thermostat units are mounted in the base of said control pylon; said thermostat units in thermal communication with said end cap and said heat  
20 conducting bridge.

64. The deep frying apparatus of claim 63 wherein a first of said thermostat units is adapted to prevent the supply of electrical power to said heating coil above a predetermined temperature of the cooking oil as

thermally communicated to said casting; said predetermined temperature being associated with an optimum temperature for deep frying.

- 5 65. The deep frying apparatus of claim 63 or 64 wherein a second of said thermostat units is adapted to act as a safety power cut-off means, acting to prevent supply of electrical power to said heating coil at a temperature significantly higher than said predetermined temperature as thermally communicated
- 10 through said heat conducting bridge.
66. A method for the heating of cooking oil in a bowl by means of a heat distributor wherein the maximum heat flux density of said heat distributor is not greater than 5 watts per centimeter squared; said method
- 15 including the steps of:
- (a) Providing a heat distributor in the form of a die cast dish having a central aperture,
  - (b) positioning said heat distributor in a bowl having a dished base and central depression,
  - 20 (c) supporting said heat source clear of said dished base.
67. The method of claim 66 wherein said die cast dish envelops a tubular heating element in heat conducting communication with said heat distributor.

68. The method of claim 66 or 67 wherein said die cast dish extends substantially between the internal confines of said bowl and the periphery of said central depression.

5 69. The method of claim 67 wherein said tubular heating element is supplied with electrical power via a control pylon sealably attached to a portion of said die cast dish.

10 70. The method of claim 69 wherein said control pylon extends vertically to at least the rim of said bowl; the upper end of said pylon sealably attached to a power control module.

15 71. The method of claim 69 or 70 wherein a temperature control module in the form of a thermostat is positioned at the base of said control pylon and in thermal communication with said die cast dish.

20 72. The method of claim 71 wherein said temperature control module is adjustable by means of a control rod extending up through said control pylon from said temperature control module to a control knob mounted to said power control module.

73. The method of any one of claims 66 to 72 wherein the surface area of said die cast dish and the electrical characteristics of said tubular heating element are



adapted to emit no greater than said maximum heat flux density of 5 watts per centimeter squared.

1/7

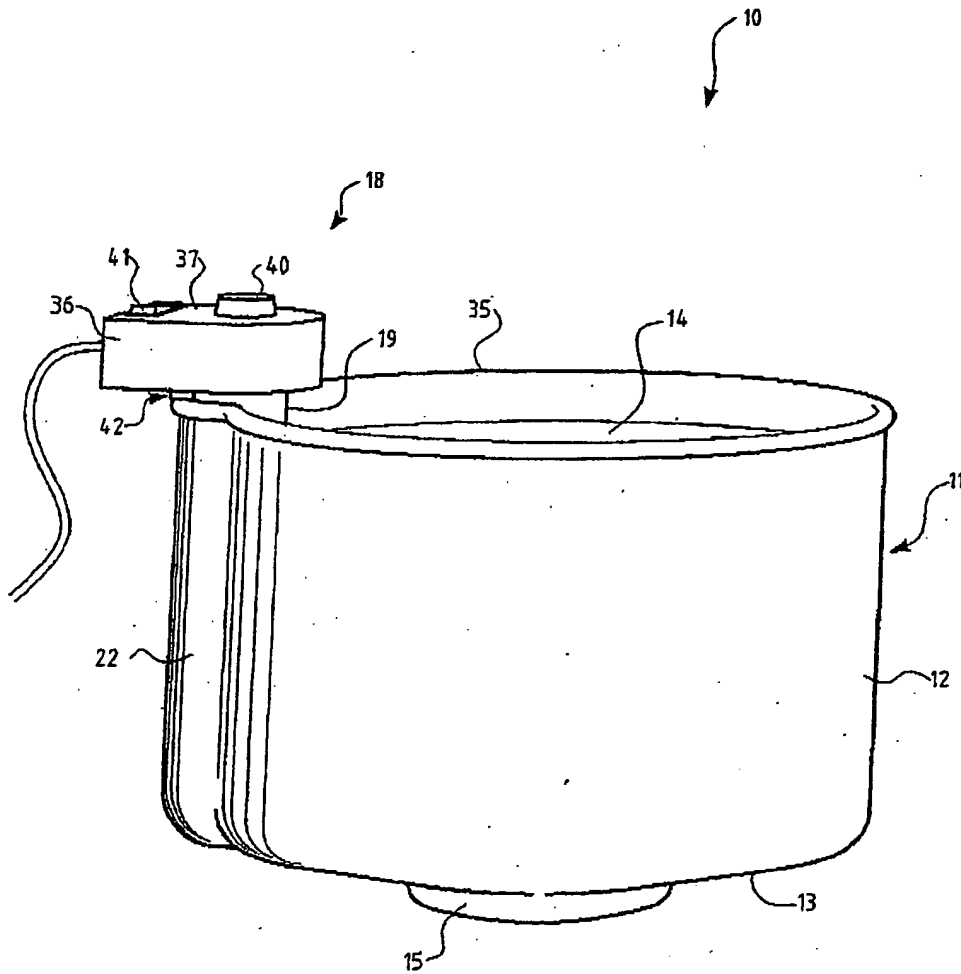


Fig. 1

BEST AVAILABLE COPY


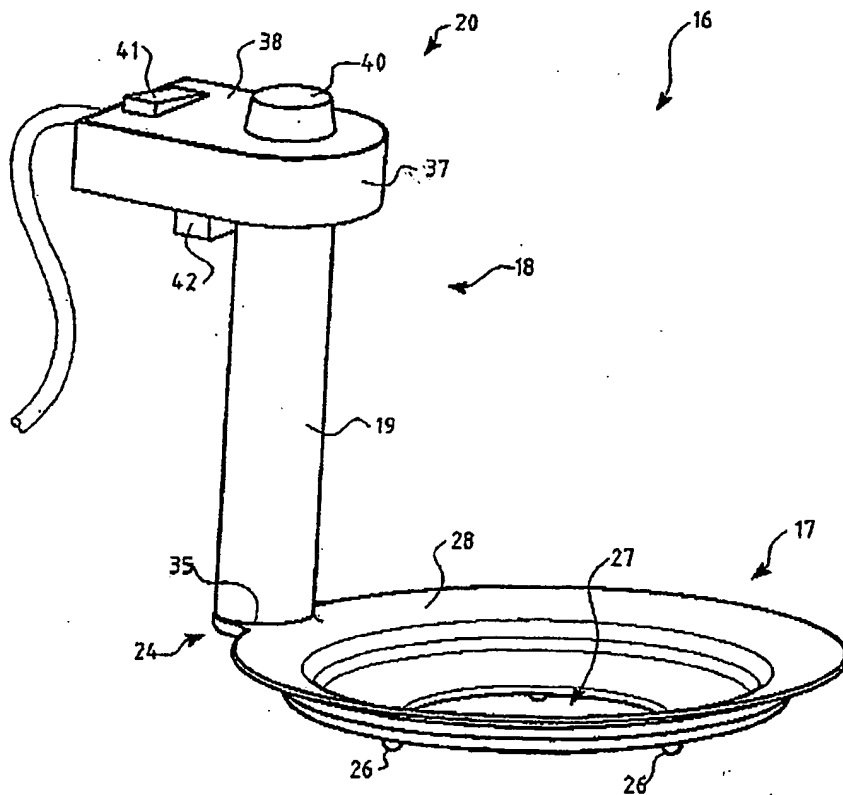


Fig. 2

Fig. 3

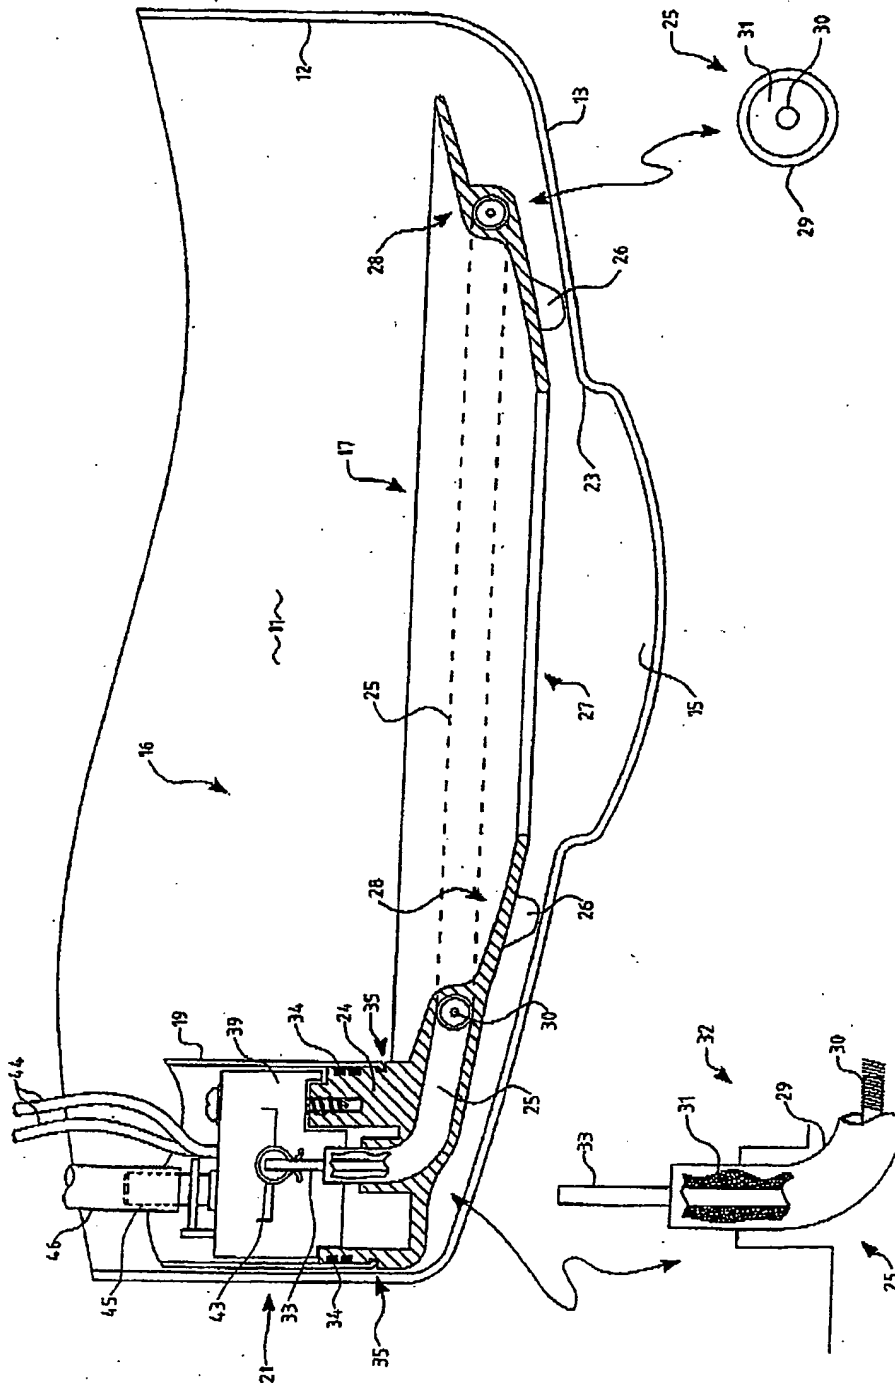

BEST AVAILABLE COPY

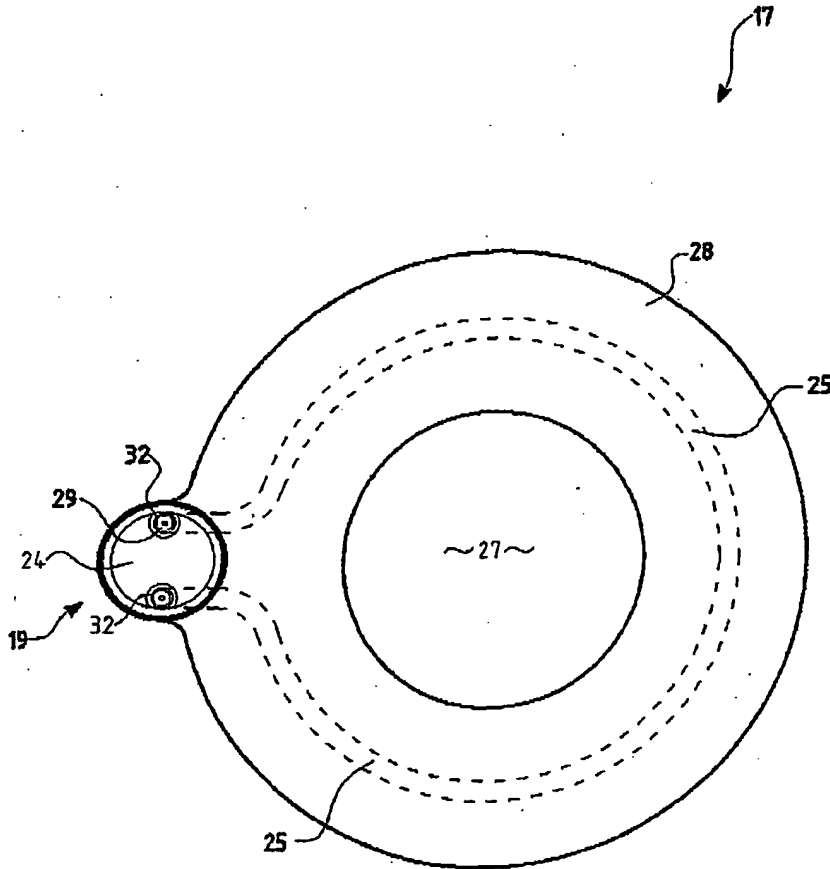


Fig. 4

5/7

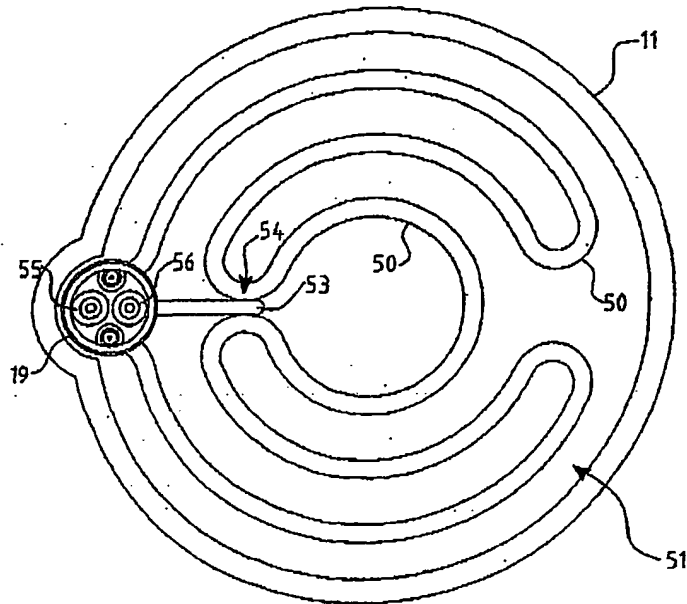


Fig. 5

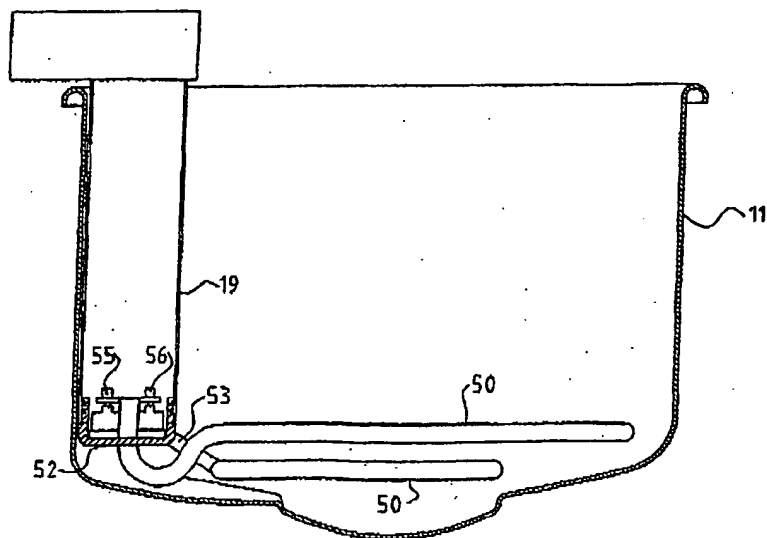


Fig. 6

BEST AVAILABLE COPY

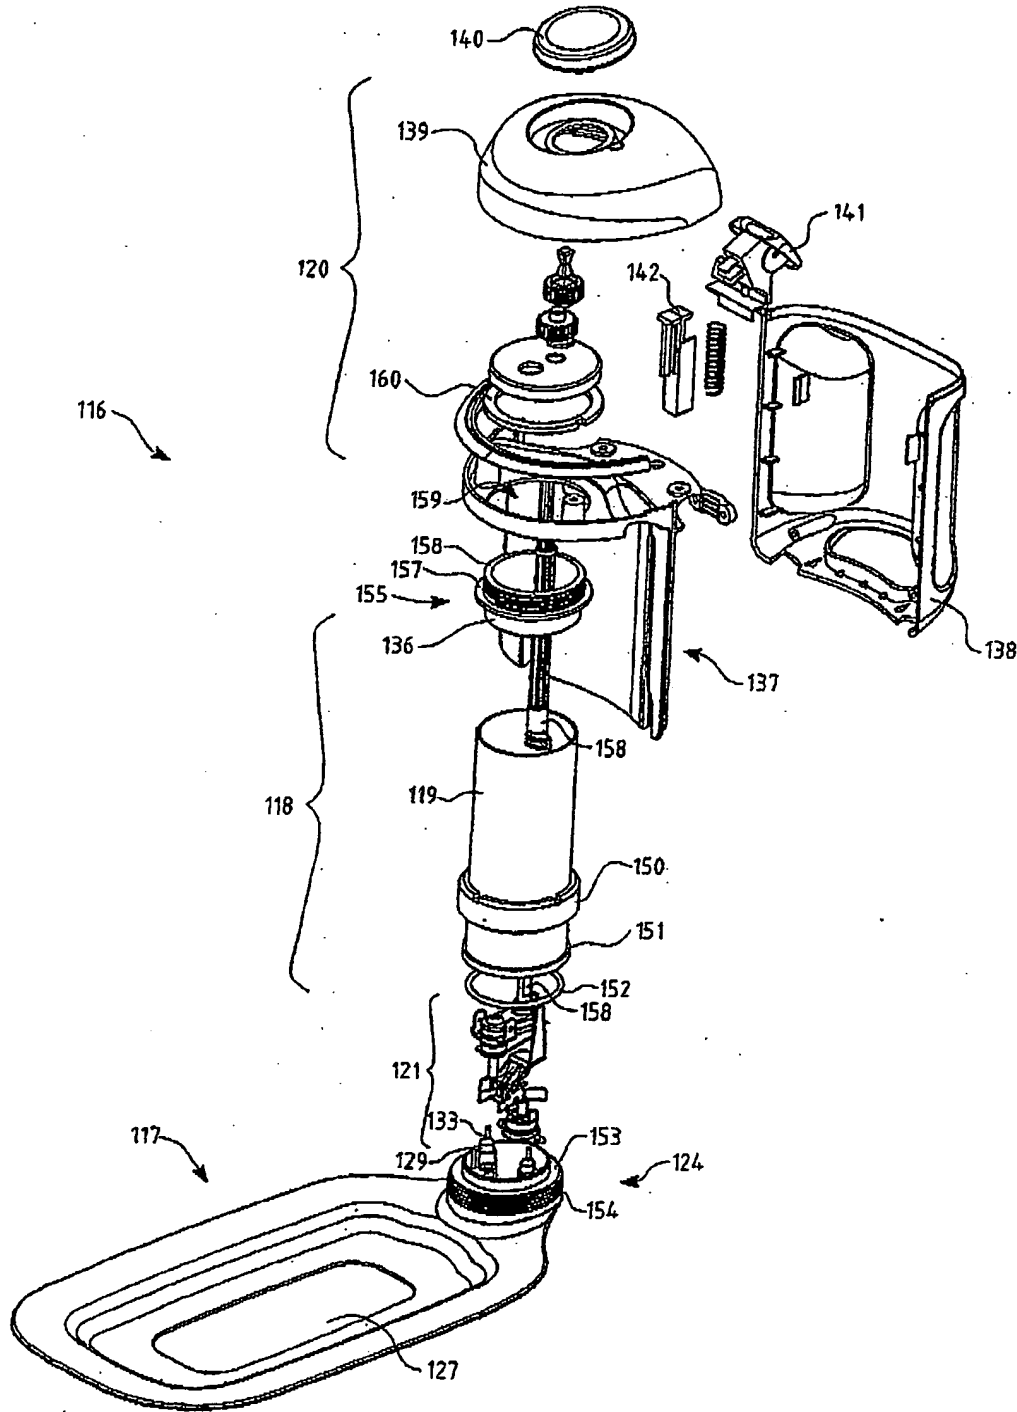


Fig. 7

10/533364

10/533364

7/7

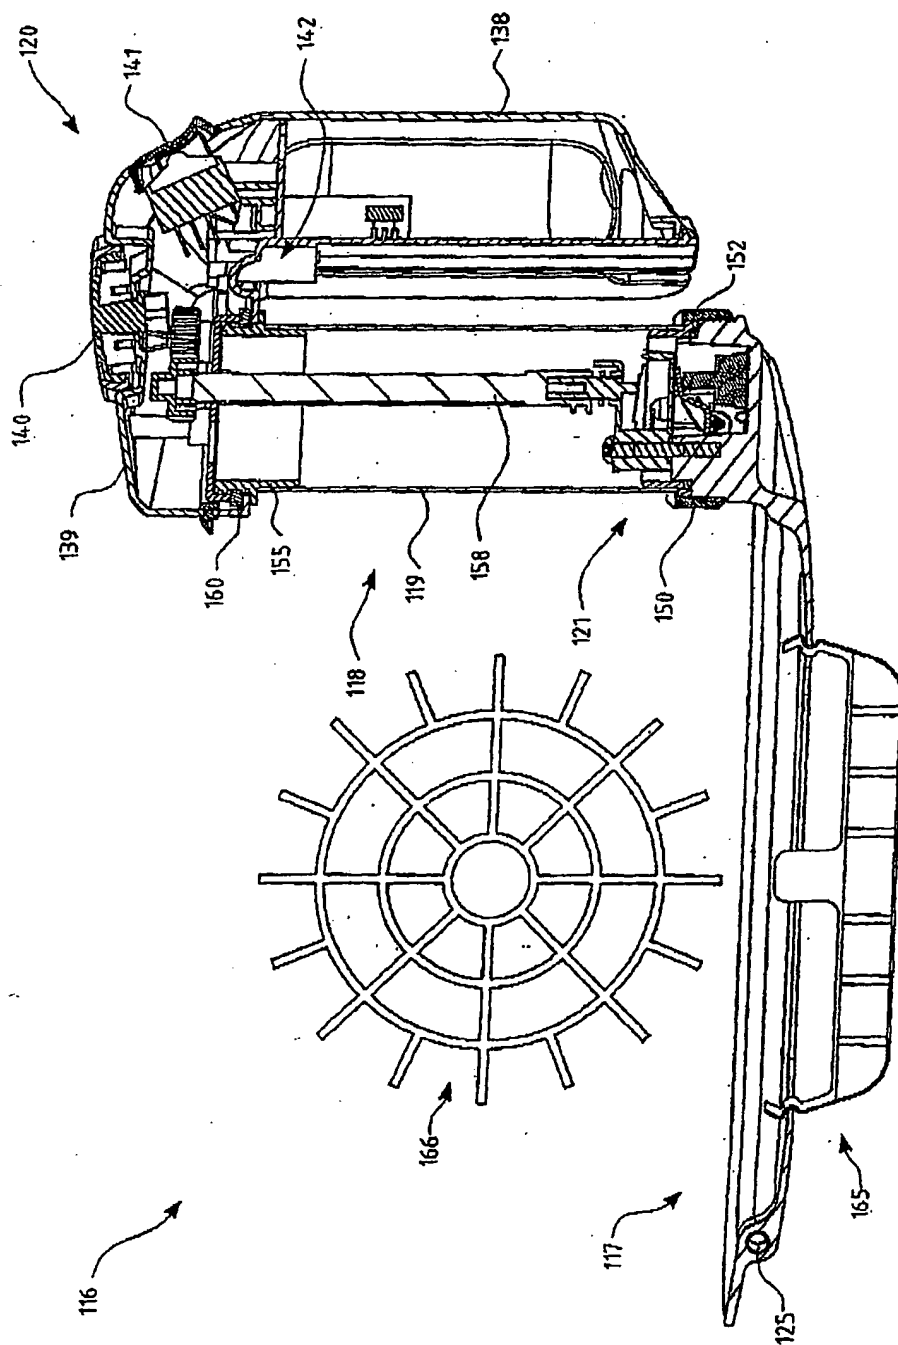


Fig. 8



## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU2003/001431

## A. CLASSIFICATION OF SUBJECT MATTER

Int. Cl. <sup>7</sup>: A47J-037/12, H05B-003/78

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Refer Electronic Database consulted below

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

AU: A47J-037/12, A47J-037/10, H05B-003/78, H05B-003/80, H05B-003/82,

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Derwent World Patent Index: (A47J-037/12 or A47J-037/10) and ELECTRIC+; (H05B-003/78 or H05B-003/80 or H05B-003/82) and (FRY+ OR OIL+)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1228731 A (VAN RATINGEN) 7 August 2002 See the whole document	1 - 73
X	Derwent abstract no. 2000-545052/50, Class P28;X27, EP 1029488 A (BSH BOSCH UND SIEMENS HAUSGERATE GMBH) 23 August 2000 See the abstract and the whole EP document	1 - 73
X	Derwent abstract no. 2000-477353/42, Class P28;X27, EP 1025788 A (VAN RATINGEN) 9 August 2000 See the abstract and the whole EP document	1 - 73

☒ Further documents are listed in the continuation of Box C
 ☒ See patent family annex

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search  
6 February 2004

Date of mailing of the international search report 12 FEB 2004

Name and mailing address of the ISA/AU

 AUSTRALIAN PATENT OFFICE  
 PO BOX 200, WODEN ACT 2606, AUSTRALIA  
 E-mail address: pct@ipaustalia.gov.au  
 Facsimile No. (02) 6285 3929

Authorized officer

 C. NGUYEN-KIM  
 Telephone No : (02) 6283 2121

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/AU2003/001431

## Box I Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos :  
because they relate to subject matter not required to be searched by this Authority, namely:
  
2. ☐ Claims Nos :  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
  
3. ☐ Claims Nos :  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a)

## Box II Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

- Independent claims 1, 32, 51, 59 define an electric deep frying appliance having a bowl and a heat distributor / heat source and a control pylon. There is no mention of how the heat distributor is located with respect to the bowl.
  - Independent claim 66 is directed to an appliance wherein the heat source is supported clear of the base of the bowl. There is no mention of any control pylon.
1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims
  2. ☒ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
  3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
  
  4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU2003/001431

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	Derwent abstract no. 93-189673/24, Class P28, EP 546208 A (MASCHINENFABRIK KURT NEUBAUER GMBH & CO) 16 June 1993 See the abstract and the whole EP document	1 - 73
X	Derwent abstract no. 2002-620546/67, Class P28;X25, DE 20207570 U (CHANG) 2 October 2002 See the abstract and the whole DE document	1 - 73
X	Derwent abstract no. 2000-566197/53, Class P28;X27, DE 19907172 A (BSH BOSCH UND SIEMENS HAUSGERATE GMBH) 24 August 2000 See the abstract and the whole DE document	1 - 73
X	Derwent abstract no. 87-192838/28, Class P28, DE 3600294 A (REDERER) 9 July 1987 See the abstract and the whole DE document	1 - 73
X	Derwent abstract no. 2002-475401/51, Class P28, JP 2002 125864 A (SAMI KK) 8 May 2002 See the abstract, and the drawings in the JP document	1 - 73
X	Derwent abstract no. 1999-544073/46, Class P28;X27, JP 11 235281 A (NICHIIWA DENKI KK) 31 August 1999 See the abstract, and the drawings in the JP document	1 - 73
X	Derwent abstract no. 96-449970/45, Class X27, JP 8 224176 A (SOTOYAMA) 3 September 1996 See the abstract, and the drawings in the JP document	1 - 73

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU2003/001431

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member	
EP	1228731	BE	1013955
EP	1029488	DE	19907129
EP	1025788	BE	1012458
EP	0546208		
DE	20207570		
DE	19907172		
DE	3600294		
JP	2002125864		
JP	11235281		
JP	8224176		
END OF ANNEX			